

TORQUE AND MEASURING TOOLS

P O W E R I N Y O U R H A N D

FEATURES OF UNIOR TORQUE TOOLS


| | | |
|-----|------------------------------|--------|
| 224 | dial torque wrench 1/2" | 262 |
| 224 | dial torque wrench 1/4" | 260 |
| 224 | dial torque wrench 3/8" | 261 |
| 225 | feeler gauges | 701 |
| 225 | folding rule | 710 W |
| 225 | measuring tapes | 710 P |
| 225 | slipper torque wrench 1/2" | 263 L |
| 225 | slipper torque wrench 1/2" | 263 |
| 226 | alu-spirit level | 1250 |
| 226 | alu-spirit level with magnet | 1252 |
| 226 | mason's profiles | 1272 |
| 226 | mason's staff | 1270 |
| 227 | mason's squares | 1262 |
| 227 | try squares | 1260 |
| 227 | try squares with back | 1260 A |
| 228 | digital vernier | 270 |
| 228 | vernier | 271 |

TORQUE AND MEASURING TOOLS

P O W E R I N Y O U R H A N D

FEATURES OF UNIOR TORQUE TOOLS



- * ALL MODELS ARE FITTED DOUBLE ENDED RATCHETING SPINDLES (1/4", 3/8", 1/2")
- * ALL MODELS HAVE OVERLOAD PROTECTION
- * MODELS HAVE VISUAL SIGNAL
- * ALL MODELS ARE SUPPLIED IN DURABLE STORAGE CASE
- * TORQUE WRENCHES ARE ACCORDANCE WITH THE REQUIREMENTS OF ISO 6789 STANDARD

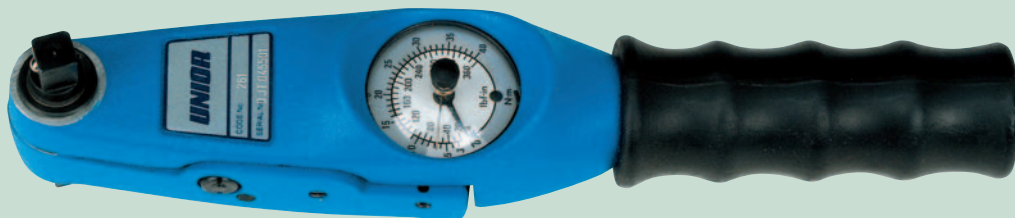

- * REVERSIBLE RATCHET HEAD
- * WRENCH OPERATES IN CLOCKWISE AND ANTI-CLOCKWISE DIRECTIONS FOR TIGHTENING ON LEFT AND RIGHT HAND THREADS
- * UNMISTAKABLE SIGNAL WHEN SET TORQUE IS REACHED
- * DUAL SCALE LBF.FT AND NM ON ART. 263L



ALL DIMENSIONS ARE IN mm, ALL WEIGHTS ARE IN g.

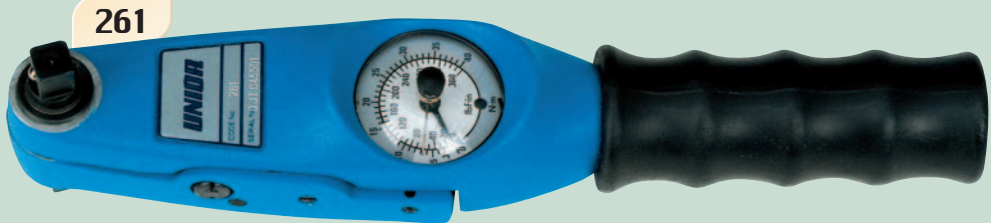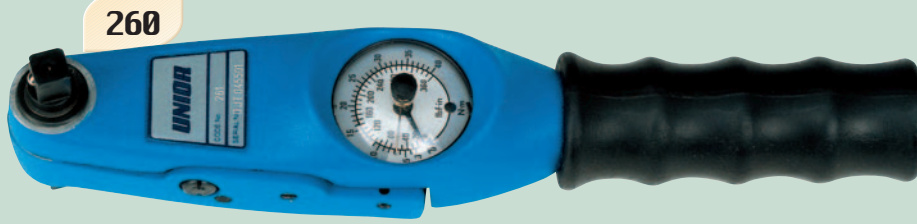

260 1/4" DIAL TORQUE WRENCH

ISO 6789

| Code | ISO (N-m) | | IMPERIA | | square | a | L | |
|--------|------------|----------------|--------------|----------------|--------|----|-----|-------|
| | RANGE | SCALE SUB-DIVS | RANGE | SCALE SUB-DIVS | | | | |
| 607138 | 0.5 - 13.5 | 0.5 | 4-120 lbf-in | 2 lbf-in | 1/4 | 61 | 244 | 520 1 |

261 3/8" DIAL TORQUE WRENCH


ISO 6789

| Code | ISO (N-m) | | IMPERIA | | square | a | L | |
|--------|-----------|----------------|---------------|----------------|--------|----|-----|-------|
| | RANGE | SCALE SUB-DIVS | RANGE | SCALE SUB-DIVS | | | | |
| 607139 | 3 - 40 | 1 | 20-360 lbf-in | 10 lbf-in | 3/8 | 69 | 244 | 520 1 |

262 1/2" DIAL TORQUE WRENCH

ISO 6789

| Code | ISO (N-m) | | IMPERIA | | square | a | L | |
|--------|-----------|----------------|-------------|----------------|--------|----|-----|--------|
| | RANGE | SCALE SUB-DIVS | RANGE | SCALE SUB-DIVS | | | | |
| 607140 | 6 - 80 | 2 | 5-60 lbf-in | 1 lbf-in | 1/2 | 86 | 435 | 1500 1 |

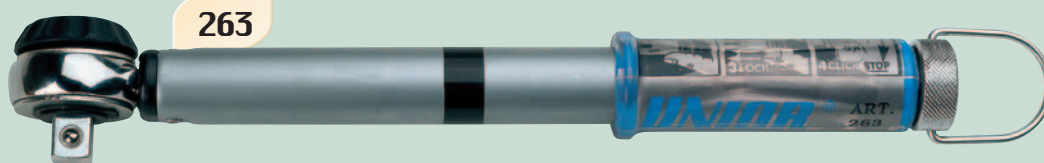


263



263 L



710 P

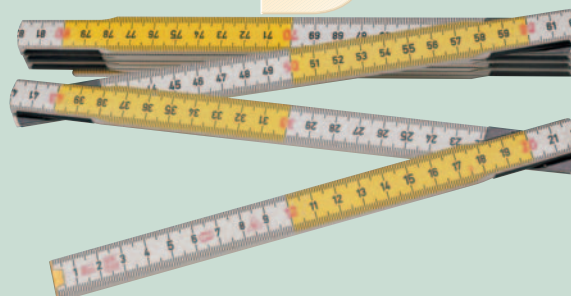

710 W



701

263

1/2" SLIPPER TORQUE WRENCH

ISO 6789

| Code | square drive | Nm | lbf.it | L | | |
|--------|--------------|----------|----------|-----|------|---|
| 607152 | 1/2" | 8 - 54 | 5 - 40 | 280 | 800 | 1 |
| 607150 | 1/2" | 30 - 150 | 20 - 110 | 420 | 1000 | 1 |
| 607151 | 1/2" | 50 - 230 | 40 - 170 | 534 | 1600 | 1 |

263 L

1/2" SLIPPER TORQUE WRENCH


ISO 6789

| Code | square drive | Nm | lbf.it | L | | |
|--------|--------------|----------|----------|-----|------|---|
| 607948 | 1/2" | 60 - 330 | 45 - 250 | 675 | 1440 | 1 |

710 W

FOLDING RULE

* wooden folding rules
* white and yellow colour (changing every 10 cm)
* graduation printed in both sides



| Code | m | d | | |
|--------|-----|----|-----|----|
| 609365 | 2 m | 17 | 110 | 10 |

710 P

MEASURING TAPE

* plastic double component casing
* with stop and clip



| Code | m | d | | |
|--------|----|----|-----|----|
| 612131 | 2 | 16 | 101 | 12 |
| 612132 | 3 | 16 | 123 | 12 |
| 612133 | 5 | 19 | 212 | 12 |
| 612134 | 8 | 25 | 447 | 12 |
| 612135 | 10 | 25 | 499 | 12 |

701

FEELER GAUGES

Certificate of conformity and guarantee
According with DIN 862
Stainless steels

FUNCTION:

- * Measurements of internal dimensions
- * Measurements of external dimension
- * Measurements of depth
- * Measurements of steps



| Code | diam | Psc/set | | |
|--------|----------|---------|--|----|
| 601896 | 0,05-0,5 | 8 | | 10 |
| 601897 | 0,05-1 | 13 | | 10 |
| 601898 | 0,05-1 | 20 | | 10 |



1250

ALU-SPIRIT LEVEL



- * quality aluminium profile, dimension 48x22 mm
- * silver eloxated
- * fitted with shock-proof plexi vials
- * accurate to 0,5 mm/m
- * electronically tested

| Code | L |  |  |
|--------|------|---|---|
| 610716 | 300 | 220 | 10 |
| 610717 | 400 | 270 | 10 |
| 610718 | 500 | 340 | 10 |
| 610719 | 600 | 380 | 10 |
| 610720 | 800 | 510 | 10 |
| 610721 | 1000 | 600 | 10 |
| 610722 | 1200 | 680 | 10 |
| 610723 | 1500 | 900 | 10 |
| 610724 | 2000 | 1200 | 10 |

1252

ALU-SPIRIT LEVEL WITH MAGNET



- * quality aluminium profile, dimension 48x22 mm
- * silver eloxated
- * fitted with shock-proof plexi vials
- * accurate to 0,5 mm/m
- * electronically tested
- * the measuring surface is equipped with two magnets
- * dimension 1000 mm with four magnets

| Code | L |  |  |
|--------|------|---|---|
| 610725 | 400 | 270 | 10 |
| 610726 | 500 | 340 | 10 |
| 610727 | 600 | 380 | 10 |
| 610728 | 800 | 510 | 10 |
| 610729 | 1000 | 600 | 10 |

1270

MASON`S STAFF



- * special aluminium profile
- * with two vials

| Code | BxRxC |  |  |
|--------|-------------|---|---|
| 610745 | 2000x100x18 | 1800 | 10 |
| 610746 | 2500x100x18 | 2300 | 10 |
| 610747 | 3000x100x18 | 2700 | 10 |
| 610748 | 4000x100x18 | 3600 | 10 |



1272

MASON`S PROFILES

- * special aluminium profile
- * with two handle and two vials
- * the hand holds are protected with plastic inserts

| Code | BxRxC |  |  |
|--------|-------------|---|---|
| 610751 | 1000x100x18 | 900 | 10 |
| 610752 | 1500x100x18 | 1350 | 10 |
| 610753 | 2000x100x18 | 1800 | 10 |
| 610754 | 2500x100x18 | 2300 | 10 |
| 610755 | 3000x100x18 | 2700 | 10 |
| 610756 | 4000x100x18 | 3600 | 10 |

ALL DIMENSIONS ARE IN mm, ALL WEIGHTS ARE IN g.

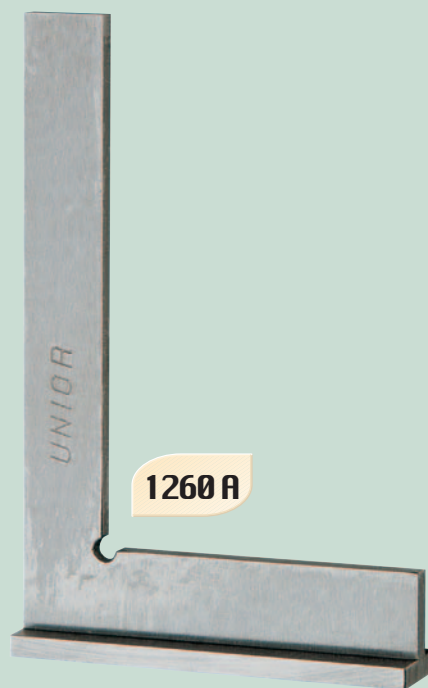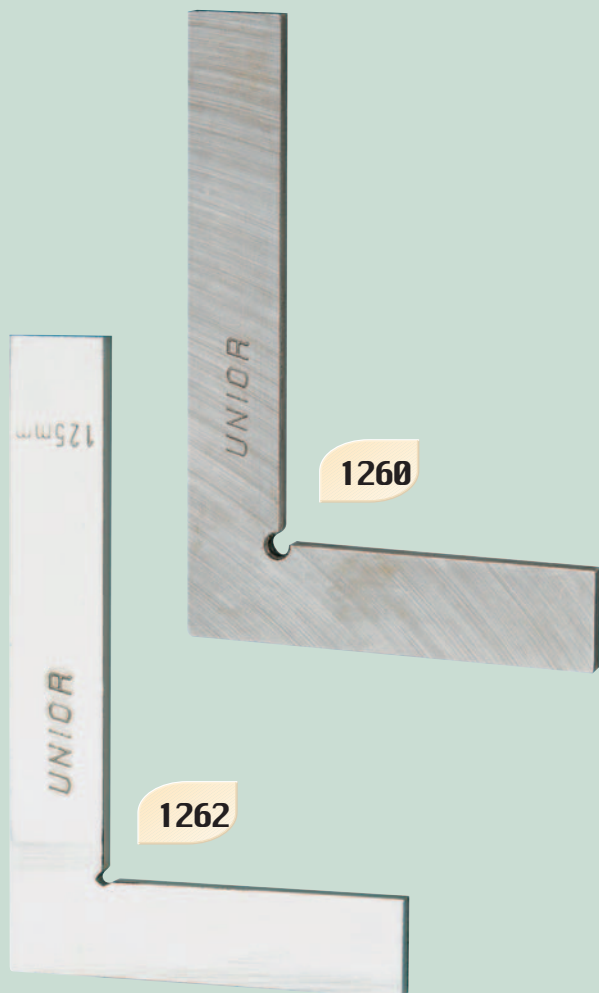

1260

TRY SQUARES

- * material: constructional steel
- * measuring faces are finely ground
- * preciness to class II- DIN Standards 875

| Code | BxHxC | 180 | 210 | 390 | 490 | 560 |
|--------|-----------|-----|-----|-----|-----|-----|
| 610730 | 125x85x5 | 180 | 210 | 390 | 490 | 560 |
| 610731 | 150x100x5 | 210 | 390 | 490 | 560 | |
| 610732 | 200x130x5 | 390 | 490 | 560 | | |
| 610733 | 250x165x5 | 490 | 560 | | | |
| 610734 | 300x200x5 | 560 | | | | |

1260 A

TRY SQUARES WITH BACK

- * material: constructional steel
- * measuring faces are finely ground
- * preciness to class II- DIN Standards 875
- * back are screved on the short leg



| Code | BxHxC | 180 | 210 | 390 | 490 | 560 |
|--------|-----------|-----|-----|-----|-----|-----|
| 610735 | 125x85x5 | 180 | 210 | 390 | 490 | 560 |
| 610736 | 150x100x5 | 210 | 390 | 490 | 560 | |
| 610737 | 200x130x5 | 390 | 490 | 560 | | |
| 610738 | 250x165x5 | 490 | 560 | | | |
| 610739 | 300x200x5 | 560 | | | | |

1262

MASON`S SQUARES


- * material: constructional steel
- * surface finish: zinc plated
- * measuring sensitiveness +/- 0.5 mm

| Code | BxHxC | 180 | 210 | 390 | 490 | 560 |
|--------|-----------|-----|-----|-----|-----|-----|
| 610740 | 125x85x5 | 180 | 210 | 390 | 490 | 560 |
| 610741 | 150x100x5 | 210 | 390 | 490 | 560 | |
| 610742 | 200x130x5 | 390 | 490 | 560 | | |
| 610743 | 250x160x5 | 490 | 560 | | | |
| 610744 | 300x175x5 | 560 | | | | |

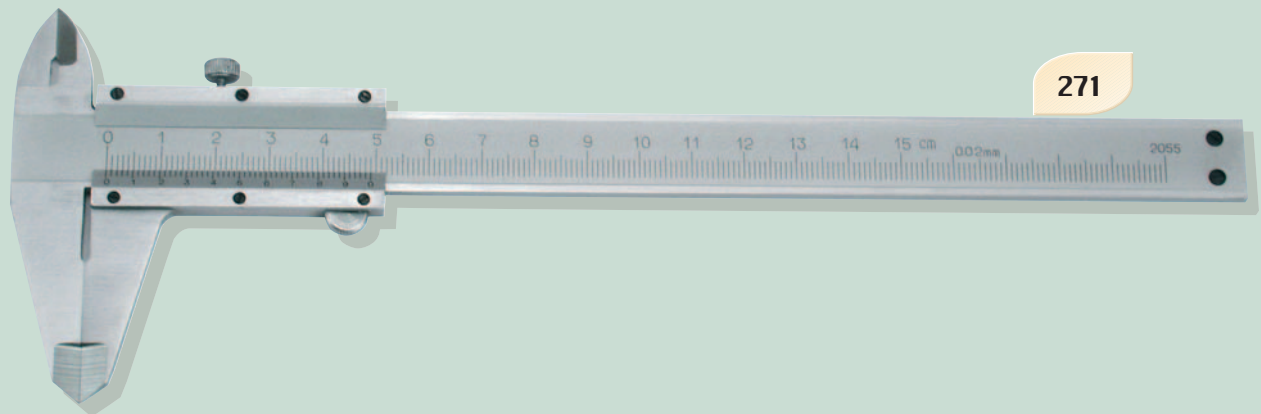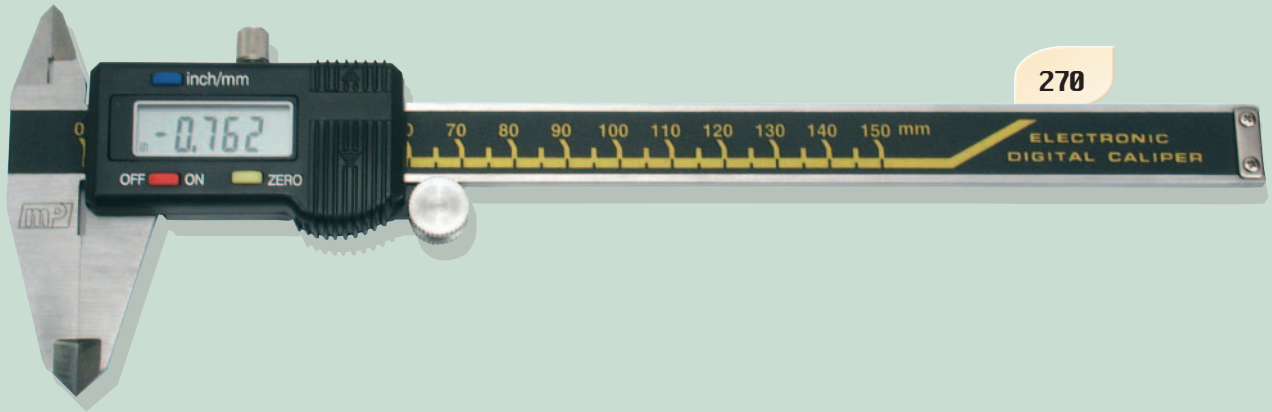

270

DIGITAL VERNIER



| Code | Range mm | A | L | | |
|--------|----------|----|-----|-----|---|
| 612034 | 0 - 150 | 40 | 235 | 150 | 1 |

| Measuring range | Accuracy |
|-----------------|-----------------------------|
| "0-150mm/0.6mm" | "0,02mm/0,001mm" (< 100mm)" |

"RESOLUTION: 0,01mm/0,0005mm"


MAX. MEASURING SPEED: 1,5m/sec

FUNCTION:

- Measurements of internal dimensions
- Measurements of external dimension
- Measurements of depth
- Measurements of steps

271

VERNIER

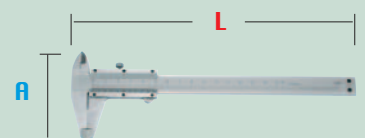

| Code | Range mm | A | L | | |
|--------|----------|----|-----|-----|---|
| 612035 | 0 - 150 | 40 | 235 | 135 | 1 |

| Measuring range | Accuracy |
|-----------------|-----------------------------|
| "0-150mm/0.6mm" | "0,02mm/0,001mm" (< 100mm)" |

"RESOLUTION: 0,01mm/0,0005mm"

FUNCTION:

- Measurements of internal dimensions
- Measurements of external dimension
- Measurements of depth
- Measurements of steps